
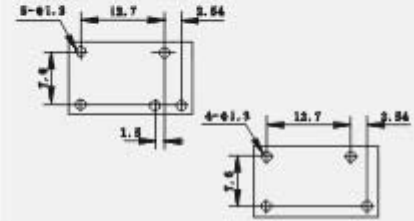


**MODEL : 32F****Terminal Layout****Mounting Holes(mm)**

CLASSIFICATION		PCB RELAY
Appearance		32F
Outline Dimension(L×W×H) (mm)		18.8×10.6×15.6
Contact Form		1A,1C
Contact Resistance		100mΩ
Coil Voltage		5VDC~24VDC
Pick-up Voltage		≤75 %
Release Voltage		≥10 %
Coil Power(W)		0.2,0.45
Contact Rating		10A 125VAC 7A 250VAC/30VDC 5A 250VAC/30VDC
Insulation Resistance		1000MΩ
Dielectric Strength	Between Open Contact	1000VAC
	Between Coil and Contact	2500VAC
Life	Electrical	1×10 <sup>5</sup>
	Mechanical	1×10 <sup>7</sup>
Temperature Range		-40 ~+70 °C
Mounting Form		PCB Terminal
Weight		16g