
## Coil former

 $\begin{array}{lll} \mbox{Material:} & \mbox{GFR 6-polyamide (UL 94 HB, insulation class to IEC 60085:} \\ & \mbox{B} \cong \mbox{max. operating temperature 130 °C}, color code natural \\ \mbox{Solderability:} & \mbox{to IEC 60068-2-20, test Ta, method 1 (aging 3): 235 °C, 2 s} \\ \mbox{Resistance to soldering heat: to IEC 60068-2-20, test Tb, method 1B: 350 °C, 3,5s} \\ \mbox{Winding:} & \mbox{see page 159} \end{array}$ 

Sections	A <sub>N</sub> mm <sup>2</sup>	I <sub>N</sub> mm	A <sub>R</sub> value μΩ	Pins	Ordering code
1	280	113	14	14	B66252-B-M1

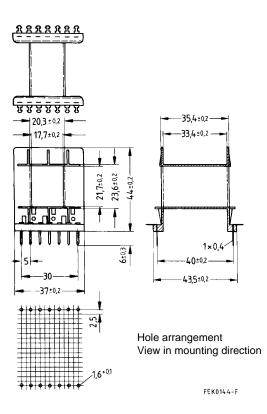

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EPCOS: B66252BM1